



## ARRL Periodicals Archive – Search Results

### A membership benefit of ARRL and the ARRL Technical Information Service

**ARRL Members:** You may print a copy for personal use. Any other use of the information requires permission (see Copyright/Reprint Notice below).

**Need a higher quality reprint or scan?** Some of the scans contained within the periodical archive were produced with older imaging technology. If you require a higher quality reprint or scan, please contact the ARRL Technical Information Service for assistance. Photocopies are \$3 for ARRL members, \$5 for nonmembers. For members, TIS can send the photocopies immediately and include an invoice. Nonmembers must prepay. Details are available at [www.arrl.org/tis](http://www.arrl.org/tis) or email [photocopy@arrl.org](mailto:photocopy@arrl.org).

**QST on CD-ROM:** Annual CD-ROMs are available for recent publication years. For details and ordering information, visit [www.arrl.org/qst](http://www.arrl.org/qst).

**Non-Members:** Get access to the ARRL Periodicals Archive when you join ARRL today at [www.arrl.org/join](http://www.arrl.org/join). For a complete list of membership benefits, visit [www.arrl.org/benefits](http://www.arrl.org/benefits).

### Copyright/Reprint Notice

In general, all ARRL content is copyrighted. ARRL articles, pages, or documents--printed and online--are not in the public domain. Therefore, they may not be freely distributed or copied. Additionally, no part of this document may be copied, sold to third parties, or otherwise commercially exploited without the explicit prior written consent of ARRL. You cannot post this document to a Web site or otherwise distribute it to others through any electronic medium.


For permission to quote or reprint material from ARRL, send a request including the issue date, a description of the material requested, and a description of where you intend to use the reprinted material to the ARRL Editorial & Production Department: [permission@arrl.org](mailto:permission@arrl.org).

**QST Issue:** Sep 1999

**Title:** The Simple Sixer

**Author:** Jim Augusteijn, KE6LDX

[Click Here to Report a Problem with this File](#)

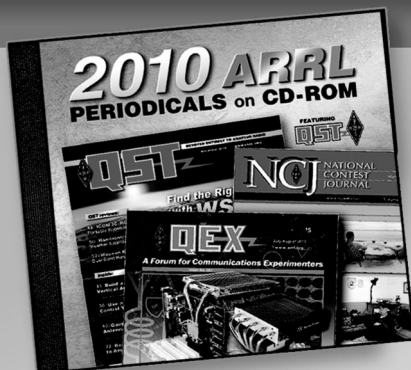

## 2010 ARRL Periodicals on CD-ROM

ARRL's popular journals are available on a compact, fully-searchable CD-ROM. Every word and photo published throughout 2010 is included!

- **QST** The official membership journal of ARRL
- **NCJ** National Contest Journal
- **QEX** Forum for Communications Experimenters

**SEARCH** the full text of every article by entering titles, call signs, names—almost any word. **SEE** every word, photo (including color images), drawing and table in technical and general-interest features, columns and product reviews, plus all advertisements. **PRINT** what you see, or copy it into other applications.

**System Requirements:** Microsoft Windows™ and Macintosh systems, using the industry standard Adobe® Acrobat® Reader® software. The Acrobat Reader is a free download at [www.adobe.com](http://www.adobe.com).

### 2010 ARRL Periodicals on CD-ROM

ARRL Order No. 2001

**Only \$24.95\***

\*plus shipping and handling

Additional sets available:

2009 Ed., ARRL Order No. 1486, \$24.95  
 2008 Ed., ARRL Order No. 9406, \$24.95  
 2007 Ed., ARRL Order No. 1204, \$19.95  
 2006 Ed., ARRL Order No. 9841, \$19.95  
 2005 Ed., ARRL Order No. 9574, \$19.95  
 2004 Ed., ARRL Order No. 9396, \$19.95  
 2003 Ed., ARRL Order No. 9124, \$19.95  
 2002 Ed., ARRL Order No. 8802, \$19.95  
 2001 Ed., ARRL Order No. 8632, \$19.95




**ARRL** The national association for AMATEUR RADIO™

SHOP DIRECT or call for a dealer near you.  
 ONLINE [WWW.ARRL.ORG/SHOP](http://WWW.ARRL.ORG/SHOP)  
 ORDER TOLL-FREE 888/277-5289 (US)

By Jim Augusteijn, KE6LDX

# The Simple Sixer

You don't need a complicated antenna to work exciting 6-meter DX. Build this rotatable dipole and use it outdoors or in your attic. It's also a good "take along" antenna for portable operating!

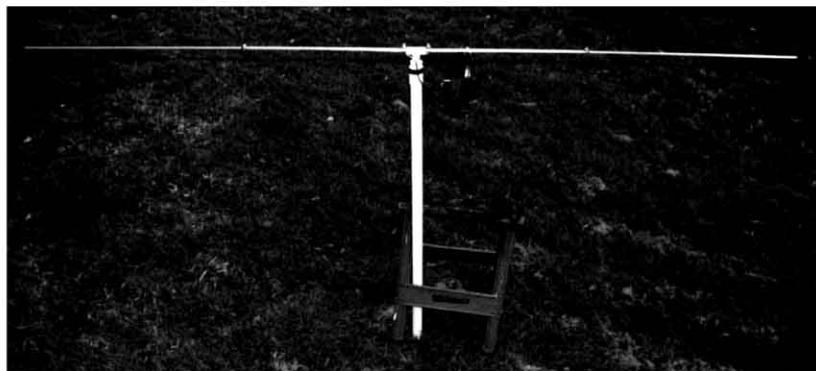

**T**hey don't call 6 meters the "Magic Band" for nothing. It can be silent for hours, then suddenly burst wide open for DX from hundreds or thousands of miles away. As we near the peak of the current solar cycle, you can even expect episodes of global DX! (We're already seeing some transatlantic and transpacific openings.)

A big beam on a tall tower is a definite asset for 6-meter work, but the other "magical" aspect of the band is that just about any antenna will send your signal bouncing around the continent or the world when conditions are right. If you don't have the budget for a tower or roof-mounted beam, something as basic as a dipole will let you enjoy much of the fun. Although a wire dipole is adequate, I prefer something more rugged. My Simple Sixer meets this requirement with its aluminum and PVC design. It assembles easily, and comes apart just as easily. If you're going roving during this month's VHF QSO Party, you can toss this antenna in the trunk of your car and get on the air from any location within minutes.

## Cutting and Soldering

Begin by cutting a  $\frac{5}{8}$ -inch notch in each of the two pieces of  $\frac{1}{2}$ -inch diameter,  $1\frac{1}{2}$ -inch long schedule-40 PVC tubing (see the "Bill of Materials"). A bench clamp will help hold them in place while you make the cuts. With a hacksaw cut two lateral slits about  $\frac{3}{4}$  inches long in the ends of each of the two  $\frac{1}{2} \times 24$ -inch pieces of aluminum tubing.

To prepare the coax, strip about  $2\frac{1}{2}$  inches of the outer insulation from one end. RG-58 is fine for most applications, but consider low-loss cable if you plan to install the antenna more than about 50 feet from your radio. Separate the braid from the center conductor, strip  $\frac{1}{2}$  inch of insulation from the center conductor and apply some solder to center conductor and the braid.

## Assembly

Insert the notched pieces of the  $1\frac{1}{2}$ -inch long PVC tubes into the PVC T (see Figure 1) and secure with PVC cement. After they are dry, slide the  $\frac{3}{8}$ -inch wood dowel into the unslit end of one of the pieces of  $\frac{1}{2}$ -inch diameter aluminum tubing. Push this tube and dowel through either of the notched pieces of  $1\frac{1}{2}$ -inch long PVC and continue pushing until the dowel goes through the PVC T and out the other side (the dowel should protrude about an inch or so). Now slide the other  $\frac{1}{2}$ -inch aluminum tube onto the protruding end of the dowel.

Use stainless-steel hose clamps on either side of the T to secure the aluminum tubes in place. As you're tightening the clamps, insert the coax center conductor and braid to opposite sides of the T and make sure the clamp will hold them in contact

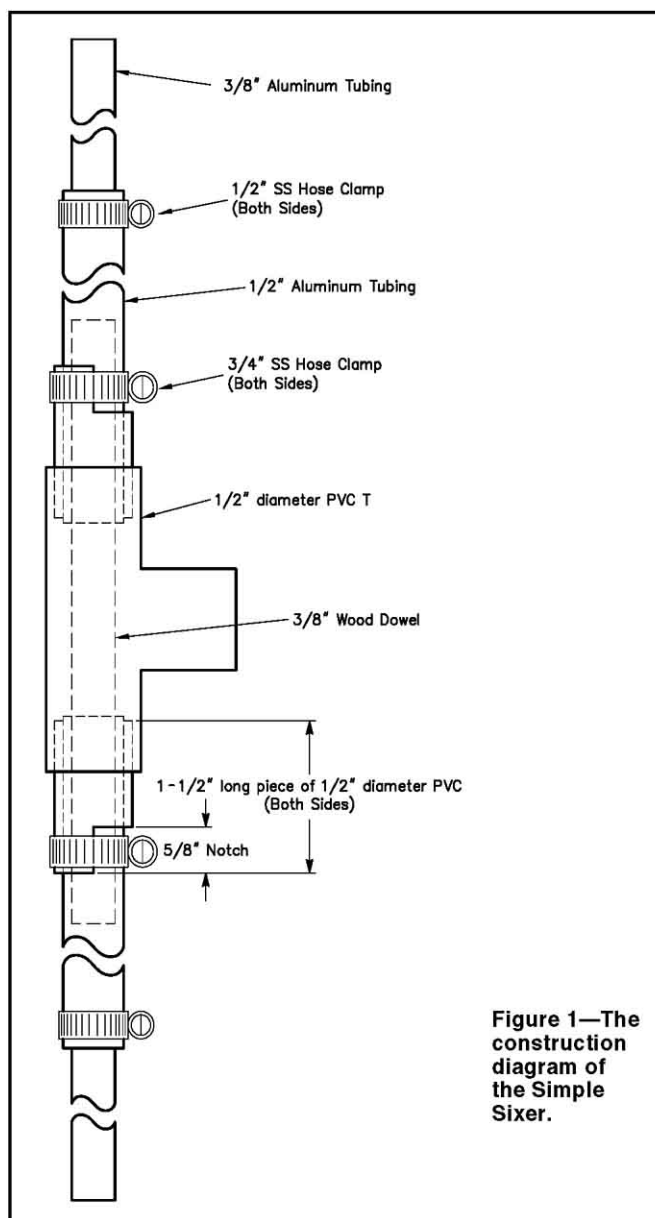
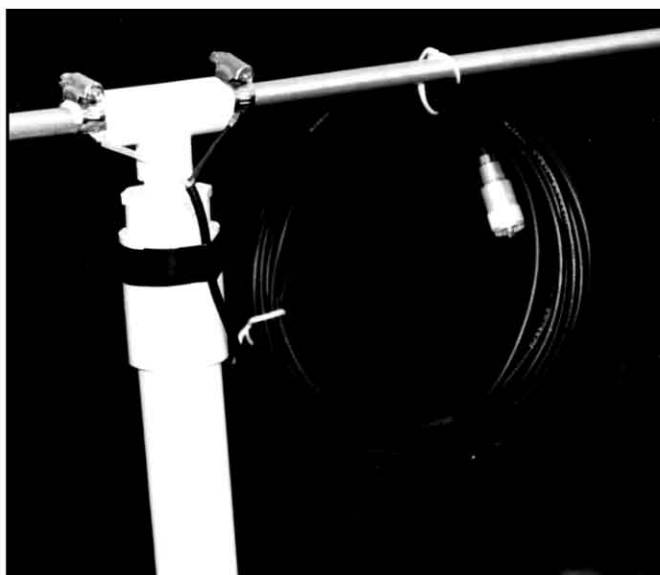


Figure 1—The construction diagram of the Simple Sixer.



**Figure 2—Use hose clamps to secure the aluminum tubing to the PVC T and to attach the coax conductors.**



**Figure 3—Tape the coax to the mast below the T to keep the connections from flexing in the wind. The remaining coax is shown rolled up and attached to the antenna in preparation for portable operation.**



**Figure 4—Complete the Simple Sixer by sliding in the narrower aluminum tubes and tightening the hose clamps.**

## The 10-Meter Version

You can convert the Simple Sixer into the Simple Tenser by adding two 48-inch long,  $\frac{1}{4}$ -inch diameter, aluminum tubes to each end of the antenna. Cut slots in the ends of the Simple Sixer's  $\frac{3}{8}$ -inch aluminum tubes and use hose clamps to hold the extensions in place. Adjust the tubes until both legs of the dipole are about 8 feet long. Now attach your SWR meter and fine-tune the antenna for resonance!

### Bill of Materials

- 2 pieces  $\frac{1}{2}$ -inch  $\times$  24-inch aluminum tubing—0.058 inch wall
- 2 pieces  $\frac{3}{8}$ -inch  $\times$  36-inch aluminum tubing—0.058 inch wall
- 2  $\frac{3}{4}$ -inch diameter stainless steel hose clamps
- 2  $\frac{1}{2}$ -inch diameter stainless steel hose clamps
- 1  $\frac{1}{2}$ -inch diameter PVC T
- 2 pieces of  $\frac{1}{2}$ -inch diameter,  $1\frac{1}{2}$ -inch-long schedule-40 PVC tubing
- 1  $\frac{3}{8}$ -inch-diameter wood dowel
- 1 Metal, wood or PVC mast

with the aluminum tubing when it's fully tightened (Figure 2). If you intend to use the Simple Sixer for a permanent outdoor installation, I recommend attaching the coax to the tubes with something more durable, such as soldered ring terminals secured with sheet metal screws, and carefully waterproofing the connections. In either case you should tightly tape the coax to the mast just below the T to prevent the connections from flexing in the wind (Figure 3).

Finally, slide the  $\frac{3}{8}$ -inch aluminum tubes into the slit ends of the  $\frac{1}{2}$ -inch aluminum tubes. Use two more stainless steel hose clamps to hold these tubes into place (Figure 4).

### Tune-up

This is the easiest part of the whole project. With an accurate VHF SWR meter, slide the  $\frac{3}{8}$ -inch aluminum tubes in or out as necessary to obtain the lowest possible SWR. Make sure you move both tubes equal distances prior to each measurement. You can adjust the Simple Sixer while using a chair or step ladder to support the antenna's mast, but keep it well away from large pieces of metal such as vehicles or aluminum siding—if they are too close, they will detune the antenna.

1542 Mellow Lane  
Simi Valley, CA 93065  
ke6ldx@arrl.net

QST

## New Products

### MFJ COMPACT SWR/POWER METER FOR 144 AND 440 MHZ

At just  $3\frac{3}{4} \times 3 \times 1\frac{1}{4}$  inches, the MFJ-844 compact VHF/UHF SWR/power meter is a handy size for mobile and portable metering applications.

A three-position slide switch allows you to choose from full-scale power ranges of 200, 60 or 15 W. A second two-position slide switch allows you to select SWR or power measurement modes. SO-239 jacks provide the connection points for your transmitter and antenna. Insertion loss is specified at 0.3 dB or less.

Price: \$69.95. The MFJ-844 VHF/UHF SWR/power meter is covered by MFJ's "No Matter What" one-year limited warranty. For more information, see your local Amateur Radio products dealer or contact MFJ, PO Box 494, Mississippi State, MS 39762; tel 800-647-1800, fax 601-323-6551, <http://www.mfjenterprises.com/>.

QST